
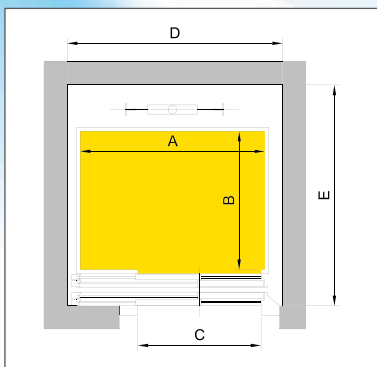
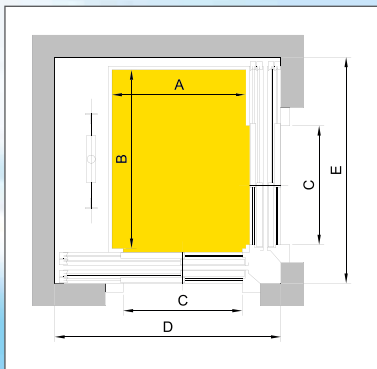
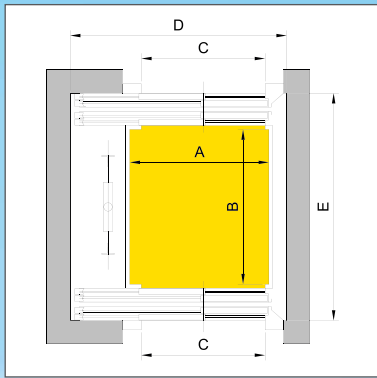


Lift meets the requirements of the construction code on accessibility for disabled persons

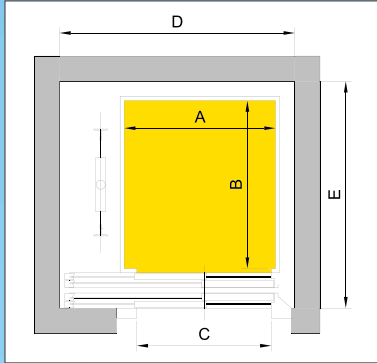

Payload (kg)	No. people	Car dimensions (mm)		Door opening (mm)	Shaft dimensions (mm)	
		A	B	C	D	E

1A2T - POWER OPERATED CAR AND LANDING DOORS - TWO-SPEED/TWO-PANEL - 1 CAR ENTRANCE

250	3	800	1000	700	1260	1330
250	3	850	1000	750	1330	1330
300	4	800	1200	750	1330	1530
300	4	800	1250	750	1330	1580
300	4	800	1300	750	1330	1630
350	4	900	1200	800	1400	1530
350	4	900	1400	800	1400	1730
400	5	1100	1300	800/900	1550	1630
400	5	1100	1400	900	1550	1730

202T - POWER OPERATED CAR AND LANDING DOORS - TWO-SPEED/TWO-PANEL - 2 OPPOSITE ENTRANCES

250	3	800	1000	700	1260	1500
250	3	850	1000	750	1330	1500
300	4	800	1200	750	1330	1700
300	4	800	1250	750	1330	1750
300	4	800	1300	750	1330	1800
350	4	900	1200	800	1400	1700
350	4	900	1400	800	1400	1900
400	5	1100	1300	800/900	1550	1800
400	5	1100	1400	900	1550	1900

Payload (kg)	No. people	Car dimensions (mm)		Door opening (mm)	Shaft dimensions (mm)	
		A	B	C	D	E

2A2T - POWER OPERATED TWO-SPEED. TWO-PANEL DOORS - 2 CAR ENTRANCES


250	3	800	1000	700	1400	1500
250	3	850	1000	750	1500	1570
300	4	800	1200	750	1480	1550
300	4	800	1250	750	1480	1600
300	4	800	1300	750	1480	1650
350	4	900	1200	800	1550	1650
350	4	900	1400	800	1550	1750
400	5	1100	1300	800/900	1700	1650/1800
400	5	1100	1400	800/900	1700	1750/1800

1P2T - POWER OPERATED TWO-SPEED. TWO-PANEL DOORS - 1 ENTRANCE


250	3	1000	800	700	1250	1370
250	3	1000	850	750	1330	1420
300	4	1200	800	750	1400	1370
300	4	1250	800	750	1450	1370
300	4	1300	800	750	1500	1370
350	4	1200	900	800	1400	1470
350	4	1400	900	800	1600	1470
400	5	1300	1100	800/900	1500/1550	1670
400	5	1400	1100	800/900	1600	1670

NOTE: The indicated sizes are approximate - for layout drawings, please contact with GMV.


Lift meets the requirements of the construction code on accessibility for disabled persons

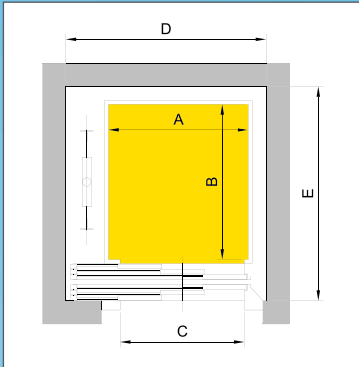


Payload (kg)	No. people	Car dimensions (mm)		Door opening (mm)	Shaft dimensions (mm)		
		A	B	C	D	E	
1A3T - POWER OPERATED CAR AND LANDING DOORS - 3-PANEL / TWO-SPEED - 1 ENTRANCE							
250	3	800	1000	700	1250	1360	
250	3	850	1000	750	1300	1360	
300	4	800	1200	750	1240	1560	
300	4	800	1250	750	1240	1610	
300	4	800	1300	750	1240	1660	
350	4	900	1200	800	1330	1560	
350	4	900	1400	800	1330	1760	
400	5	1100	1300	800/900	1550	1660	
400	5	1100	1400	900	1550	1760	

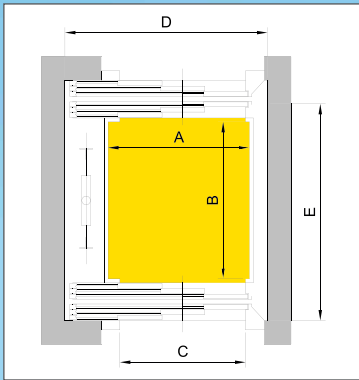

Payload (kg)	No. people	Car dimensions (mm)		Door opening (mm)	Shaft dimensions (mm)		
		A	B	C	D	E	
203T - POWER OPERATED CAR AND LANDING DOORS - 3-PANEL / TWO SPEED - 2 OPPOSITE ENTRANCES							
250	3	800	1000	700	1250	1560	
250	3	850	1000	750	1300	1560	
300	4	800	1200	750	1240	1760	
300	4	800	1250	750	1240	1810	
300	4	800	1300	750	1240	1860	
350	4	900	1200	800	1330	1760	
350	4	900	1400	800	1330	1960	
400	5	1100	1300	800/900	1550	1860	
400	5	1100	1400	900	1550	1960	

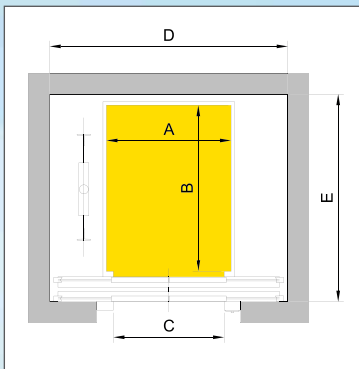

Payload (kg)	No. people	Car dimensions (mm)		Door opening (mm)	Shaft dimensions (mm)		
		A	B	C	D	E	
1A2C - POWER OPERATED CAR AND LANDING DOORS - TWO-PANEL CENTRAL DOORS - 1 ENTRANCE							
250	3	800	1000	700	1530	1300	
250	3	850	1000	750	1630	1300	
300	4	800	1200	750	1630	1500	
300	4	800	1250	750	1630	1550	
300	4	800	1300	750	1630	1600	
350	4	900	1200	800	1730	1500	
350	4	900	1400	800	1730	1700	
400	5	1100	1300	800/900	1730/1930	1600	
400	5	1100	1400	900	1730/1930	1700	

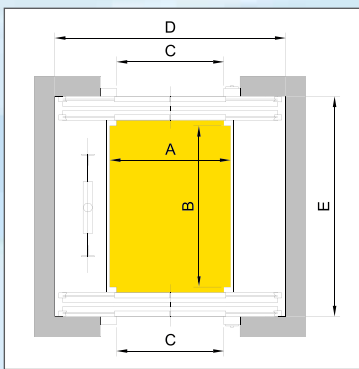

Payload (kg)	No. people	Car dimensions (mm)		Door opening (mm)	Shaft dimensions (mm)		
		A	B	C	D	E	
202C - POWER OPERATED CAR AND LANDING DOORS - TWO-PANEL CENTRAL DOORS - 2 OPPOSITE ENTRANCES							
250	3	800	1000	700	1530	1440	
250	3	850	1000	750	1630	1440	
300	4	800	1200	750	1630	1640	
300	4	800	1250	750	1630	1690	
300	4	800	1300	750	1630	1740	
350	4	900	1200	800	1730	1640	
350	4	900	1400	800	1730	1840	
400	5	1100	1300	800/900	1730/1930	1740	
400	5	1100	1400	900	1730/1930	1840	

NOTE: The indicated sizes are approximate - for layout drawings, please contact with GMV.